

CARGO TRUCKS

URAL NEXT

URAL



URAL NEXT 4320-74



RELIABILITY

- Updated driveline with service life and reliability enhanced by 50%
- Pneumatic brake system with WABCO components
- High resistance to corrosion



CROSS-COUNTRY ABILITY

- Engine power up to 312 h.p.
- Differentials locking
- Central tire pressure control system



COMFORT

- New NEXT bonnet-type cab
- Air-sprung driver's seat
- Heat and noise insulation
- Optimal internal environment



GUARANTEE & SERVICE

- 24-month or 100,000 km guarantee
- 15,000 service-to-service interval



SAFETY

- Bonnet-type cab layout improving driver's safety
- RBL steering



COST EFFICIENCY

- Competitive price among similar vehicles
- Low cost of ownership


TECHNICAL DATA

URAL NEXT 4320-74 UNIVERSAL PLATFORM TRUCK WITH TANK

The universal platform truck with sides is designed for transportation of cargoes and containers. The tank container is made of stainless steel that allows to transport liquids, including salting liquids. The tank container is outfitted with all necessary equipment for filling and draining of liquids, namely cases for delivery-suction hoses and hoses themselves, a line with quick-detachable connection, Ø 80 mm.

The overall dimension of the container fixing profile conforms to standards for 20' containers. It allows using the container carrier for transportation of any standard containers that have the overall height not exceeding 2470 mm. The truck is universal - any superstructures can be mounted onto its platform, like a wagon body intended for different needs, an isothermal wagon for transportation of goods that require maintaining a certain temperature range, etc. The container-carrying platform body of the truck is outfitted with removable sides and pillars of the body sides that allow using as a platform truck with sides for transportation of cargoes up to 10,950 kg.

Basic chassis	URAL-NEXT 4320-74
Weight parameters	
Kerb weight of container carrier, kg	12 150
Kerb weight of platform truck with sides	10 200
Gross vehicle weight, kg	21 300
Payload on platform body with sides, kg	10 950
Weight of water transported in tank container, kg	9 000
Engine	YAMZ-536 / YAMZ-53642.10 with compression ignition, in line, / emission class 4 (UN ECE Regulation)
Rated power, (h.p.) (kW)	312 (228) / 285
Max. engine speed, min ⁻¹	2300
Max. torque, kgf·m	125 / 115
engine speed at max. torque, min ⁻¹	1300...1600
Gearbox	ZF 9S Type - mechanical, 9-speed / YAMZ-1105, Mechanical, 5 speed
Overall dimensions of container-carrying platform	
Cab	Type - bonnet-type, three-seat, two-door
Cross distance between container fittings, mm	2 259
Longitudinal distance between container fittings, mm	5 853
Cargo platform length, mm	6 220
Width, mm	2 456
Platform side height, mm	600
Overall vehicle dimensions (L x W X H), mm	9 600x2 500x3 220
Loading height, mm	1 530
Tank container	
Tank container capacity, m ³	9
Number of sections, units	1
Version	1 filler, 1 draining valve
Tank cross section shape	Suitcase
Tank material	Stainless steel
Tank pipe, mm	Du 80

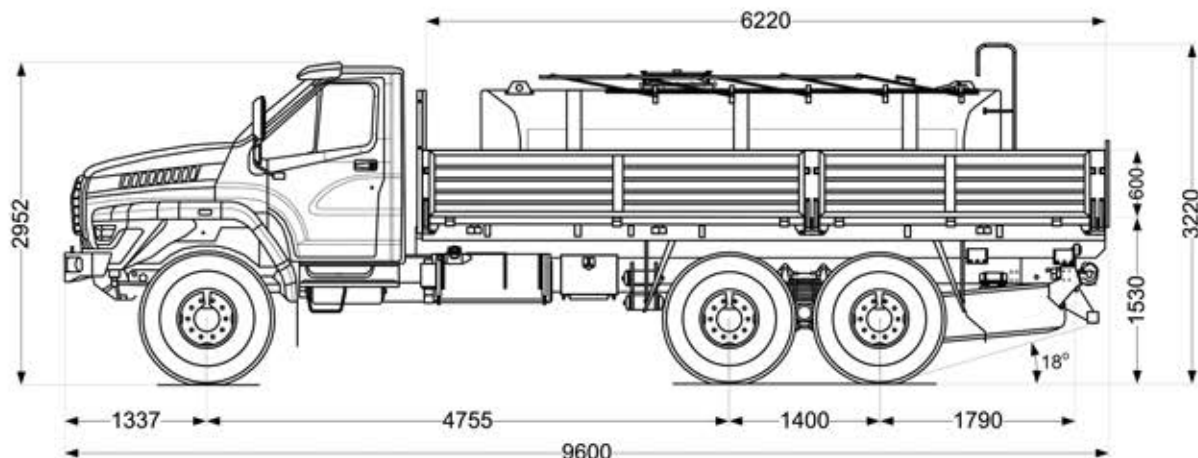

Exclusively Distributed by:



Cebu: 71 Juan Luna Ave. Kasambagan Mabolo, Cebu City • Telefax: 032.520.2214
 Manila: Parc House 1, Suite 33, 227 EDSA Greenhills, Mandaluyong City 1554 • Telefax: 02.576.8606
 Warehouse: Canaynay Avenue, BF Homes Martinville Subd., Manuyo Dos, Las Pinas, Mañila
 Davao: Diversion Highway, Manila Pangi, Talomo Davao City
 www.conequip-ph.com • info@conequip-ph.com