

Dynapac PL350

Compact planers

Atlas Copco



Technical data



Cutting section

| | |
|-----------------------|---------|
| Working width | 13.8 in |
| Cutting depth | 3.9 in |
| Cutting drum diameter | 20.5 in |
| Spacing | 0.5 in |
| Number of tools | 38 |



Working performance

| | |
|-----------------|--------------|
| Operating speed | 0 -82 ft/min |
| Travel speed | 0 -3.6 mp/h |



Tank capacities

| | |
|----------------|---------|
| Fuel tank | 33 gal |
| Hydraulic tank | 29 gal |
| Water tank | 106 gal |



Electrical system

| | |
|-------------------------------|------------|
| Heavy-duty cold start battery | 2 x 12V |
| Generator | 12 V /35 A |



Loading system

| | |
|--------------------------|---------|
| Belt width | 9.8 in |
| Maximum discharge height | 29.5 in |



Masses

| | |
|--|------------|
| Transport mass | 7,496 lbs |
| Operating mass (CE) | 8,157 lbs |
| Ballast mass | 2,425 lbs |
| Conveyor with scraper (standard) | 220.46 lbs |
| Max. operating mass (incl. ballast) | 10,141 lbs |
| Max. operating mass, fully loaded (CE) | 10,803 lbs |



Engine

| | |
|------------------------|-------------------|
| Manufacturer/Model | Cummins B 3.3 |
| Fuel | Diesel |
| Cooling | Water |
| Number of cylinders | 4 |
| Rated power, SAE J1995 | 60 hp @ 2,200 rpm |

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.


rce_pl350_us-20141210.084500.pdf 2014-12-10 08:45

Dynapac PL350

Compact planers

Atlas Copco

Technical data

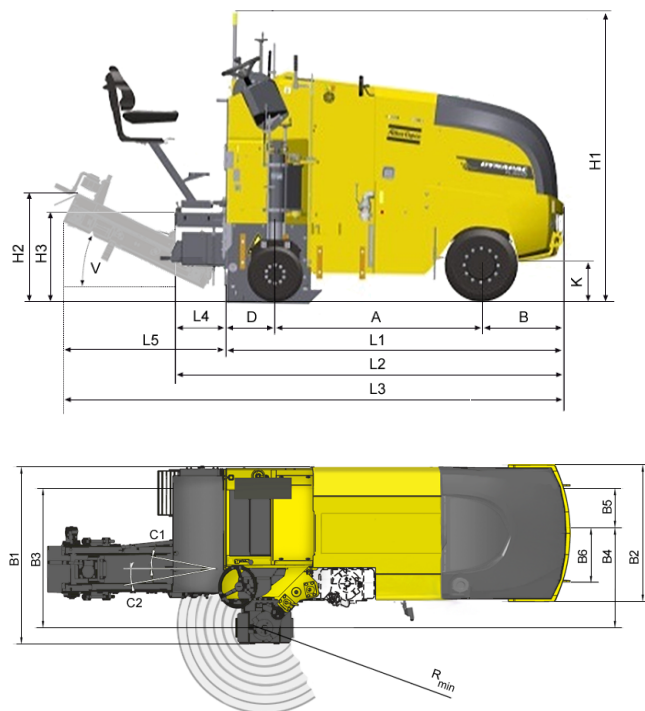

Dimensions

| | |
|----------------------------------|----------|
| A. Wheelbase | 61.8 in |
| B. Front to axle | 24.4 in |
| B1. Width, max. | 51.6 in |
| B2. Width, standard | 39.8 in |
| B3. Width, wheel track | 40.6 in |
| B4. Width | 29.1 in |
| B5. Width | 11.4 in |
| B6. Width | 16.1 in |
| C1. Conveyor angle, left | 10° |
| C2. Conveyor angle, right | 10° |
| D. Rear to axle | 11.8 in |
| H1. Height, max. | 79 in |
| H2. Height, max. | 29.5 in |
| H3. Height | 27.0 in |
| K. Ground clearance | 12.0 in |
| L1. Length | 116.3 in |
| L2. Length, with folded conveyor | 120.7 in |
| L3. Length, with conveyor | 149.6 in |
| R. Milling radius, min. | 3.9 in |
| V. | 26° |
| α1. Steering angle, left | 75° |
| α2. Steering angle, right | 75° |



Optional equipment

- Fine milling drum (spacing 0.24 in)

Find us locally at www.atlascopco.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

rce_pl350_us-20141210.084500.pdf 2014-12-10 08:45